


Suspended luminaires Coray CLP

Coray CLP



- Lighting technology LED
- Suspended luminaire for three-circuit track or surface mounting
- Textile suspension wire, black or white
- With integral reflector SSP, SP, MFL, FL or WFL
- Supply unit included
- Connection to power supply by 3-pole terminal block or 3-circuit adapter
- DALI or INspire lighting control system on request (INspire Lighting Control not for use in metal ceilings)
- Colours: white, anthracite, silver

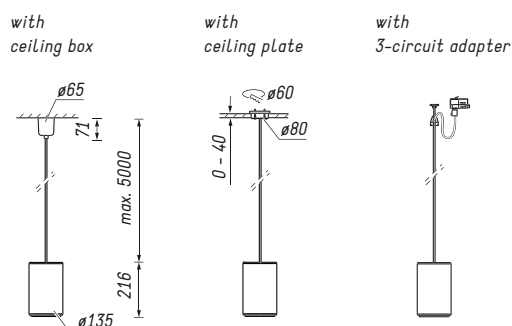

Photometric data

CRI Light colour	Power Level					
	30W		34W		40W	
	Luminous flux luminaire [lm]	System Efficiency [lm/W]	Luminous flux luminaire [lm]	System Efficiency [lm/W]	Luminous flux luminaire [lm]	System Efficiency [lm/W]
830	3989	133	4417	129	5029	125
840	4200	140	4651	136	5086	127
927	3250	108	3599	105	4097	102
N27	2388	79	2633	77	2976	74
930	3433	114	3802	111	4328	108
940	3599	120	3985	117	4536	113
Brilliant [930=Best color/ Best White]	3251	108	3586	105	4052	101
Meat	1922	64	-	-	2374	59
NMeat	1529	51	-	-	1904	47

Maximum possible, optionally available connected load: 48 W.






According to IEC 6722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10 %.

The values apply to the luminaire with MFL reflector, in the case of the SSP/SP/FL/WFL reflectors the values can deviate +/- 5 %.

The photometric values are standard values and refer to the entire luminaire. This is an example of a system design.

There are further possible ways to equip the luminaire - for these optional versions please contact info@ansorg.de.

Suspended luminaires Coray CLP

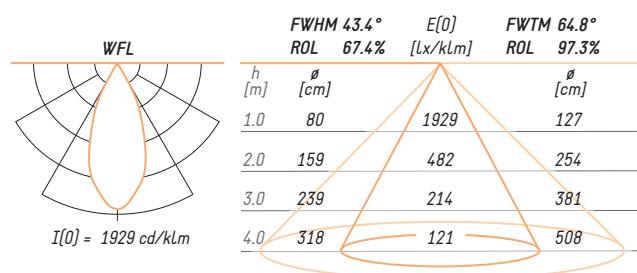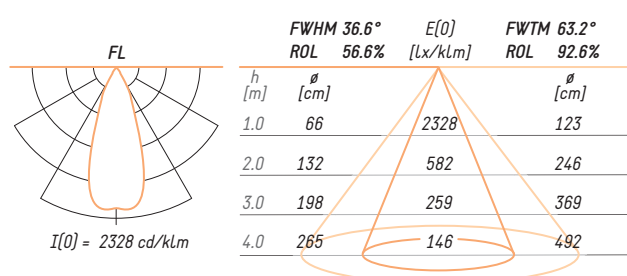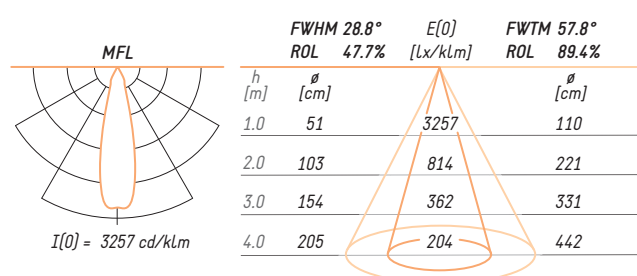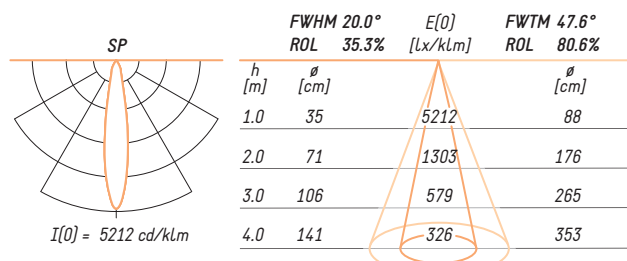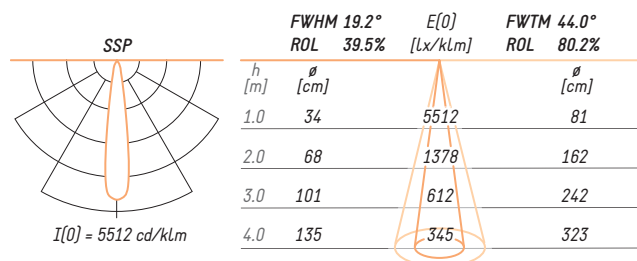

Photometric information

Information	Values
Connection data	220-240 V, 50/60 Hz [110-277 V on request]
Weight	approx. 2.3 kg
Colour tolerance	3SDCM (MacAdam)
Maintenance of luminous flux	L80/B10 = 50.000h, Ta 25 °C
Failure rate	C0/B10 = 50.000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	25
Protection class	1
Type of protection	IP20
Certification mark	ENEC / CB / EAC

Optional accessories

Product	Option
Interchangeable reflector	SSP, SP, MFL, FL, WFL
Glasses	Safety glas
	EnergyVision (anti-glare)
	Albarino (diffusing lens)
	Ribbed glass (oval light image)
Filter	UV filter
	Moodfilter