



Coray CMR



- Lighting technology LED
 - Tool-less ceiling mounting
 - Ceiling cut-out Ø130 mm
 - Floor and wall mounting not permitted
 - Turning and tilting (355°/25°)
 - With integral reflector SSP, SP, MFL, FL, WFL or VWFL
 - Supply unit included
 - Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
 - Version with DALI or Casambi on request (Casambi not compatible with metal ceilings)
- Colours: white, anthracite, silver on request

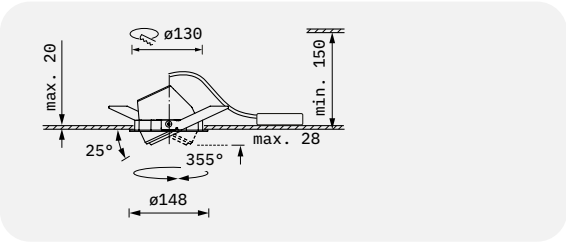







- 100% recyclable
 - Designed in accordance with the Ecodesign Directive (2019/2020/EU)
 - Long LED life due to efficient thermal management
- 

Photometric data

CRI Colour quality	Power level							
	19 W		23 W		27 W		31 W	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	2380	126	2788	122	3178	118	3542	114
840	2498	132	2927	128	3350	124	3719	120
927	1938	103	2270	100	2588	96	2885	93
930	2038	108	2388	105	2722	101	3035	98
940	2142	113	2510	110	2861	106	3190	103
Brilliant (930 = Best color/ Best White)	1951	104	2278	100	2585	96	2864	93
N27	1433	75	1667	72	1889	69	2090	66

Maximum possible, optionally available connected load: 31 W.
According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The values apply to the luminaire with MFL reflector, in the case of the SSP/SP/FL/WFL/VWFL reflectors

the values can deviate +/- 5%. The photometric values are standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains two light sources of energy efficiency class D (830/840), E (927/930/940), F (N27) or G (Meat/NMeat).

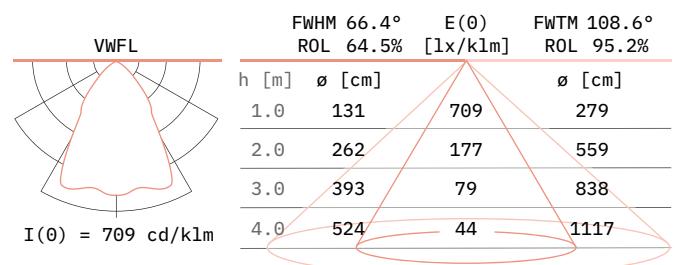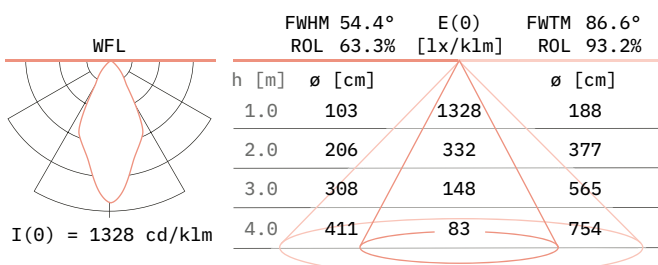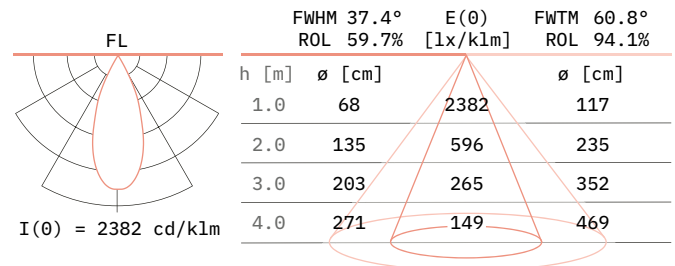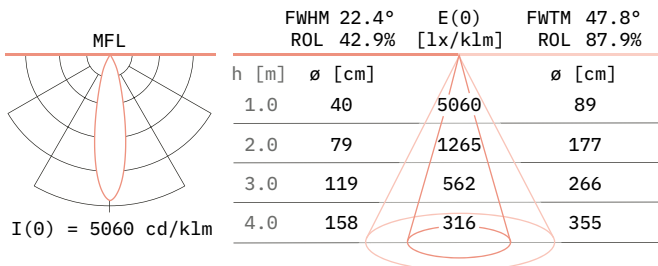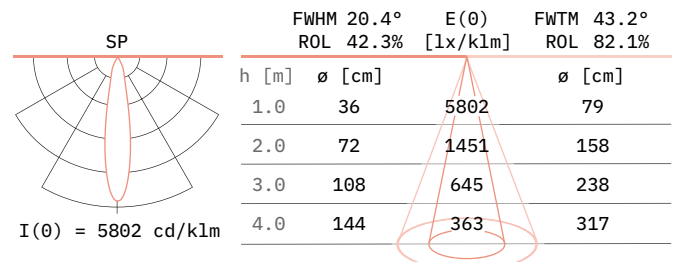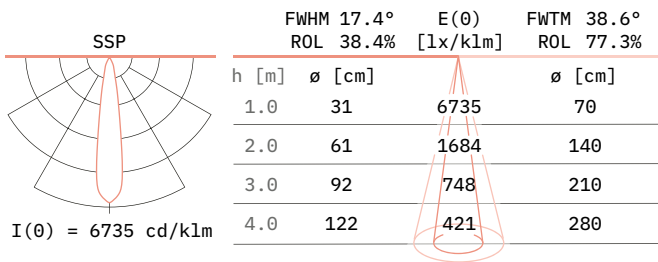

Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 0.8 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 ≥ 50,000h, Ta 25 °C L90/B50 ≥ 50,000h, Ta 25 °C
Failure rate	C0/B10 ≥ 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	25
Protection class	1
Type of protection	IP20
Certification mark	ENEC / CB

Optional accessories

Product	Option
Interchangeable reflector	SSP, SP, MFL, FL, WFL, VWFL
Glasses	Safety glas Safety glas (anti-glare) Diffusing glass Ribbed glass (oval light image)
Filter	UV filter Moodfilter
Glare reduction	Honeycomb grid, black Tube oblique