


# Coray CXS



100% recyclable,  
no composites,  
easy separation.






- Lighting technology LED
- Tool-less mounting 48 V circuit track
- Floor and wall mounting not permitted
- Turning and tilting (360°/90°)
- With integral collimator SSP, SP or MFLL
- Supply unit not included
- Colours: white, anthracite



		Power Level	
		9W	
Photometric data	CRI	Luminous flux luminaire	System Efficiency
	Light colour	[lm]	[lm/W]
	830	600	67
	840	600	67
	927	500	56
930	500	56	

Maximum possible, optionally available connected load: 9 W.  
 According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%.  
 The photometric values are standard values and refer to the entire luminaire. This is an example of a system design.  
 There are further possible ways to equip the luminaire - for these optional versions please contact [info@ansorg.de](mailto:info@ansorg.de).

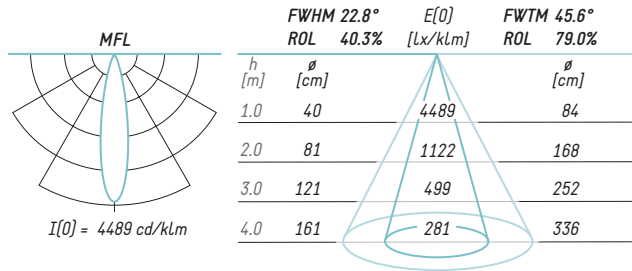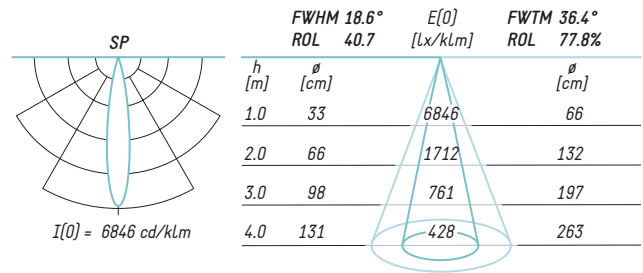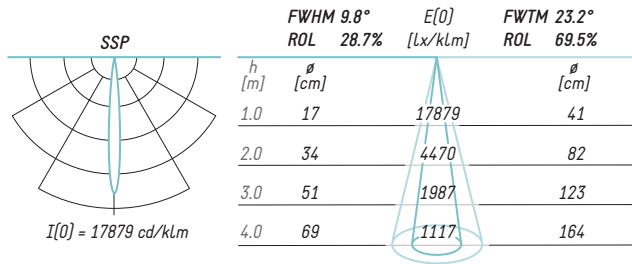

**Technical data**

Information	Values
Connection data	48 V/DC; 9 W
Weight	approx. 0.2 kg
Colour tolerance	3SDCM (MacAdam)
Maintenance of luminous flux	L80/B10 ≥ 50,000h, Ta 25 °C L90/B50 ≥ 50,000h, Ta 25 °C
Failure rate	C0/B10 ≥ 50,000h, Ta 25 °C
Photobiological safety	RG2
Number per circuit breaker B 16A	-
Protection class	3
Type of protection	IP20
Certification mark	ENEC / CB / EAC

**Optional accessories**

Product	Option
Interchangeable collimator	SSP, SP, MFL
Track	48 V
Supply unit	prim. 220-240V, 50/60 Hz, sek. 48 V DC/70 W prim. 220-240V, 50/60 Hz, sek. 48 V DC/150 W