




Coray CXS

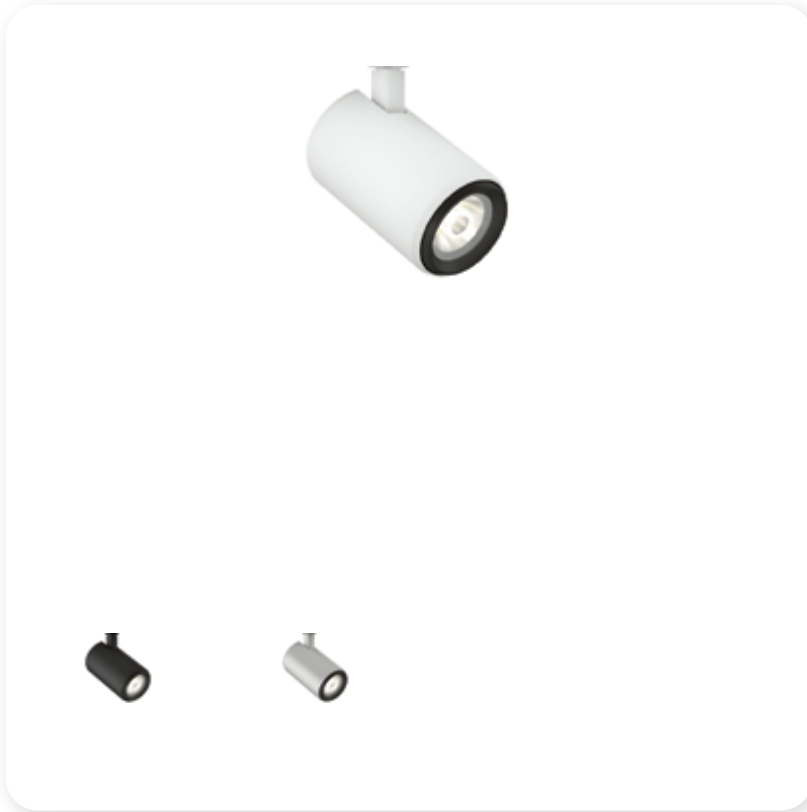

- Lighting technology LED
 - Tool-less mounting with adapter for 48 V circuit track
 - Floor and wall mounting not permitted
 - Turning and tilting (360°/90°)
 - With integral collimator SSP, SP or MFL
 - Supply unit not included
 - Version with DALI on request
- Colours: white, anthracite, silver on request

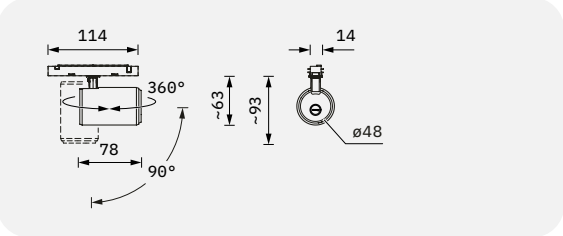




- 100% recyclable
 - Designed in accordance with the Ecodesign Directive (2019/2020/EU)
 - Long LED life due to efficient thermal management
- 

Photometric data

CRI Colour quality	Power level	
	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	600	67
840	600	67
927	500	56
930	500	56

Maximum possible, optionally available connected load: 9 W.
According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The photometric values are

standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains two light sources of energy efficiency class D (830/840) or E (927/930).

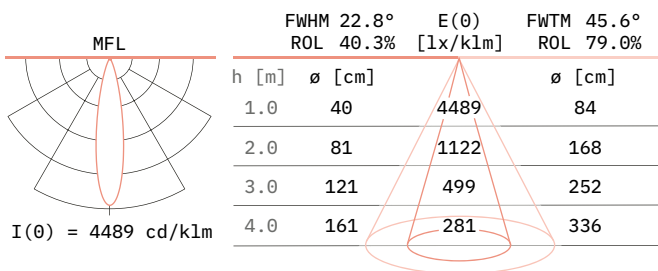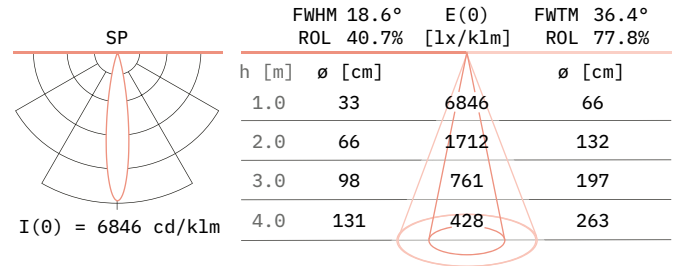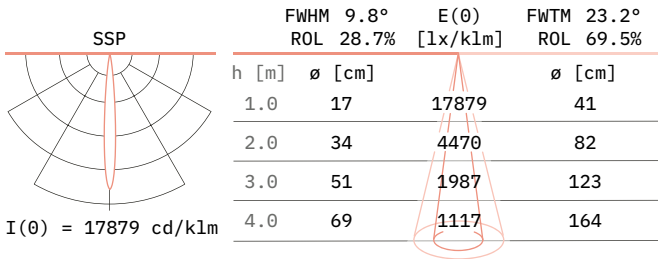

Technical data

Information	Values
Connection data	48 V/DC, 9 W
Weight	approx. 0.2 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 ≥ 50,000h, Ta 25 °C L90/B50 ≥ 50,000h, Ta 25 °C
Failure rate	C0/B10 ≥ 50,000h, Ta 25 °C
Photobiological safety	RG2
Number per circuit breaker B 16A	-
Protection class	3
Type of protection	IP20

Optional accessories

Product	Option
Interchangeable collimator	SSP, SP, MFL
Rail	48 V
Supply unit	prim. 220-240V, 50/60 Hz, sec. 48 V DC/70 W prim. 220-240V, 50/60 Hz, sec. 48 V DC/150 W