



Lightstripe LWL



- Lighting technology LED
 - Function panel (double module) with wallwasher (tilt angle ~132°)
 - Fitting of the function panel in the frame without the use of tools
 - Floor and wall mounting not permitted
 - With integral reflector WW
 - Supply unit included
 - Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
 - Version with DALI or Casambi on request (Casambi not compatible with metal ceilings)
- Colours : white, anthracite

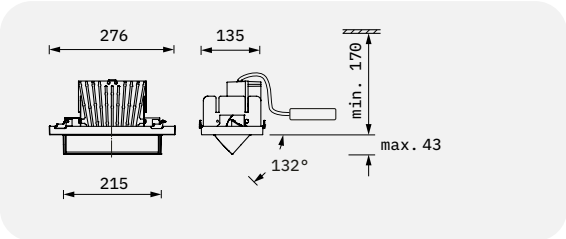


- 100% recyclable
 - Designed in accordance with the Ecodesign Directive (2019/2020/EU)
 - Long LED life due to efficient thermal management
- 

Photometric data


CRI Colour quality	Power level			
	26 W		34 W	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	3925	150	4885	143
840	4133	158	5144	150
927	3198	122	3980	116
930	3378	129	4205	123
940	3541	135	4407	129
Brilliant (930 = Best color/ Best White)	3209	122	3966	116

Maximum possible, optionally available connected load: 38 W.
According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The photometric values are

standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains two light sources of energy efficiency class D (830/840) or E (927/930/940).



Planning information



Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 1.3 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 \geq 50,000h, Ta 25 °C L90/B50 \geq 50,000h, Ta 25 °C
Failure rate	C0/B10 \geq 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	34
Protection class	1
Type of protection	IP20

Accessories

Product	Option
Fitting frame	Lightstripe LLS 1-3 modules

Optional accessories

Product	Option
Blank panel	Lightstripe LLS 1-2 modules