



Lintra LLT



- Lighting technology LED
 - Linear module for three-circuit track
 - Tool-less mounting with track adapter for three-circuit track (Global or Stucchi)
 - Floor and wall mounting not permitted
 - Lineare optics with beam characteristic DNB, DMB, DWB or WB
 - Supply unit included
 - Version with DALI on request
- Colours : white, anthracite

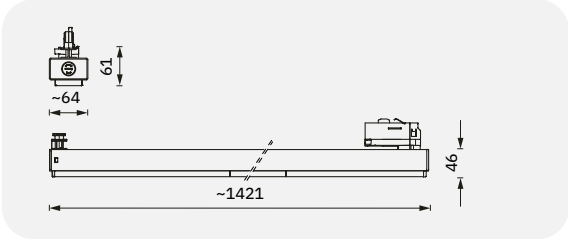


- 100% recyclable
 - Designed in accordance with the Ecodesign Directive (2019/2020/EU)
 - Long LED life due to efficient thermal management
- 

Photometric data

CRI Colour quality	Power level			
	63 W		71.8 W	
	Optic WB		Optic DNB, DMB, DWB	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	9215	146	12200	170
835	9340	148	12528	174
840	9460	150	12857	179


Maximum possible, optionally available connected load: 71.8 W.
According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The photometric values are

standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains light sources of energy efficiency class D (830/835/840).

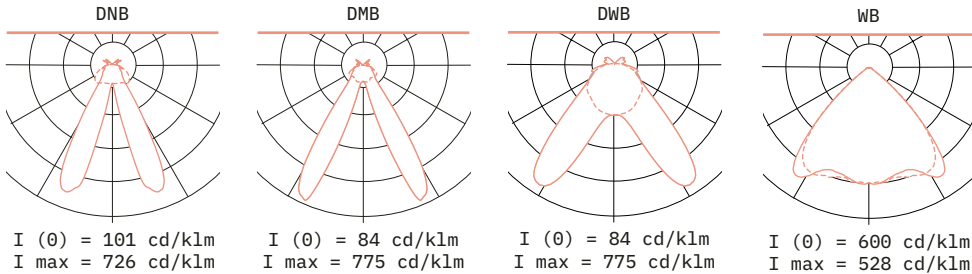

Planning information

Recommended mounting height



Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 2.2 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 \geq 50,000h, Ta 25 °C L90/B50 \geq 50,000h, Ta 25 °C
Failure rate	C0/B10 \geq 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	30
Protection class	1
Type of protection	IP20
Certification mark	ENEC / CB in preparation