



# Mona MIL



- Lighting technology LED
  - Suspended luminaire for three-circuit track or surface mounting
  - Lamp shade in two sizes and three colours
  - Textile suspension wire, black or white
  - With integral reflector SSP, SP, MFL, FL or WFL
  - Supply unit included
  - Connection to mains by means of 3-pole terminal block or 3-circuit adapter
  - Version with DALI on request
- Colours: lamp shade white, black, grey - available in all RAL colours on request, lamp shade inside colour is always white

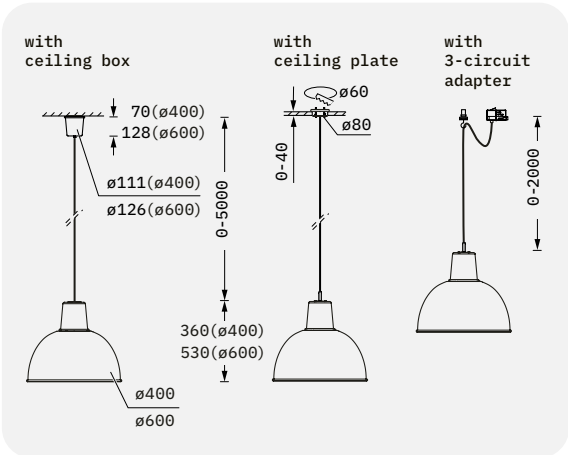






- 100% recyclable
  - Designed in accordance with the Ecodesign Directive\*1
  - Long LED life due to efficient thermal management
- 

## Photometric data

CRI Colour quality	Power level							
	26 W		30 W		34 W		40 W	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	3550	135	3989	133	4417	129	5029	125
840	3737	143	4200	140	4651	136	5086	127
927	2892	110	3250	108	3599	105	4097	102
930	3055	117	3433	114	3802	111	4328	108
940	3202	122	3599	120	3985	117	4536	113
Brilliant (930 = Best color/ Best White)	2902	111	3251	108	3586	105	4052	101
N27	-	-	2350	78	-	-	3081	77
Meat	-	-	-	-	-	-	2374	59
NMeat	-	-	-	-	-	-	1904	47

Maximum possible, optionally available connected load: 40 W.  
According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The values apply to the luminaire with MFL reflector, in the case of the SSP/SP/FL/WFL/VWFL reflectors the values can deviate +/- 5%. The photometric values are standard values and

refer to the entire luminaire. Other light qualities on request to info@ansorg.com.  
This product contains light sources of energy efficiency class D (830/840), E (927/930/940), F (N27) or G (Meat/NMeat).  
\* 1 : Ecodesign Directive (2019/2020/EU)

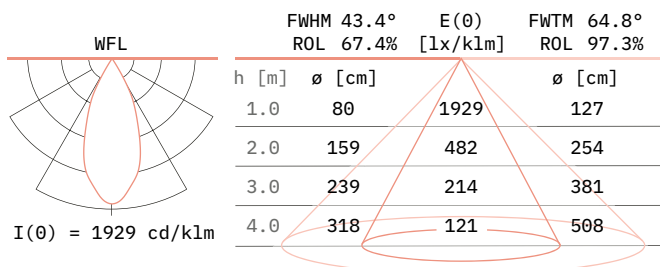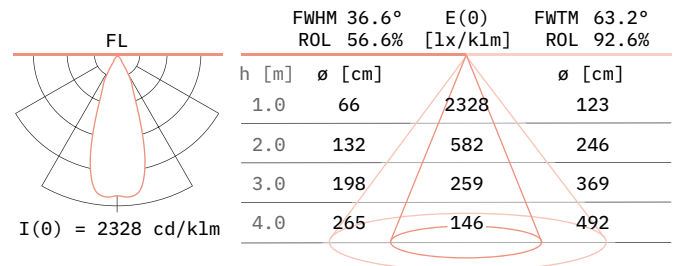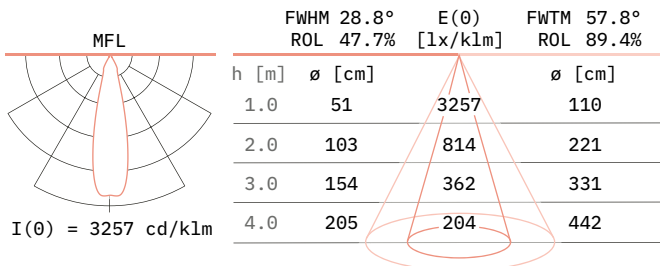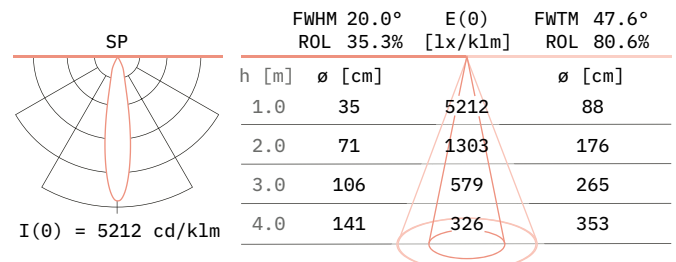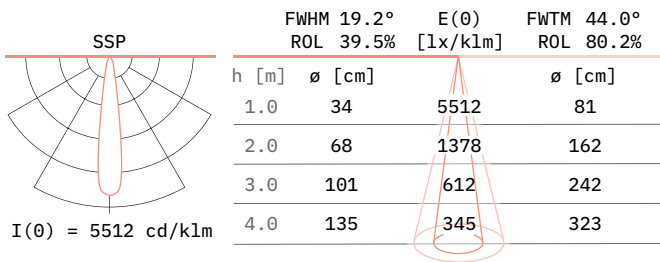

## Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 4.0 kg (ø400 mm) / 6.0 kg (ø600 mm)
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 ≥ 50,000h, Ta 25 °C L90/B50 ≥ 50,000h, Ta 25 °C
Failure rate	C0/B10 ≥ 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	25
Protection class	1
Type of protection	IP20
Certification mark	ENEC / CB

## Optional accessories

Product	Option
Interchangeable reflector	SSP, SP, MFL, FL, WFL
Glasses	Safety glas Safety glas (anti-glare) Diffusing glass Ribbed glass (oval light image)
Filter	UV filter Moodfilter
Glare reduction	Honeycomb grid, black