



Navo NMT



- Lighting technology LED
 - Tool-less mounting with track adapter for three-circuit track (Global or Stucchi)
 - Floor and wall mounting not permitted
 - Turning and tilting ($360^\circ/\pm 10^\circ$)
 - With integral reflector DF-NB or WW
 - Supply unit included
 - Version with DALI or Casambi on request
- Colours: white, anthracite, silver on request

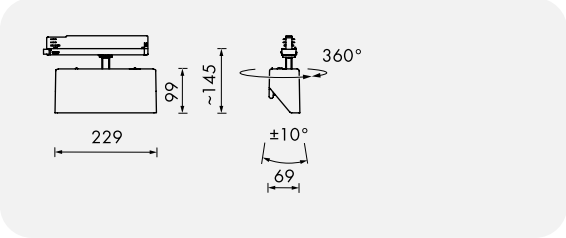


- 100% recyclable
 - Designed in accordance with the Ecodesign Directive (2019/2020/EU)
 - Long LED life due to efficient thermal management
- 

Photometric data

CRI Colour quality	Power level							
	27 W		31 W		35 W		40 W	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	3444	128	3851	124	4244	121	4795	115
840	3616	134	4044	130	4455	127	5034	121
927	2805	104	3136	101	3457	98	3905	94
930	2951	109	3299	106	3636	103	4108	99
940	3100	115	3467	112	3988	113	4316	104
Brilliant (930 = Best color/ Best White)	2811	104	3130	101	3436	98	3858	93
N27	2079	76	2316	74	2546	71	2862	68

Maximum possible, optionally available connected load: 41 W.
According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The photometric values are


standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains two light sources of energy efficiency class D (830/840), E (927/930/940) or F (N27).

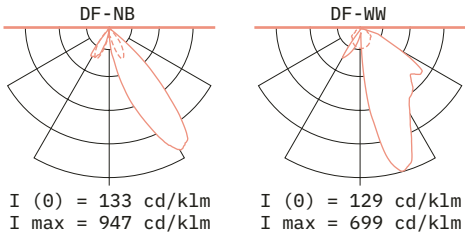

Planing information


DF-NB

Preferred mounting
height rail



WW

Preferred mounting
height rail

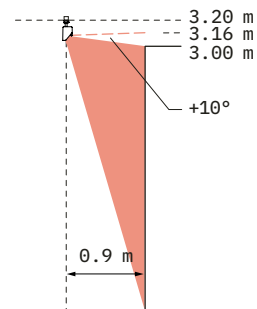

Technical data

Informations	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 0.8 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 $\geq 50,000\text{h}$, Ta 25 °C L90/B50 $\geq 50,000\text{h}$, Ta 25 °C
Failure rate	C0/B10 $\geq 50,000\text{h}$, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	50
Protection class	2
Type of protection	IP20
Certification mark	ENEC / CB