


Navo NSK DF



- Lighting technology LED
 - Spotlight as directional washer
 - Tool-less mounting with track adapter for three-circuit track
 - Floor and wall mounting not permitted
 - Adapter turnable (180°)
 - With integral reflector DF-NB or DF-NX
 - Interchangeable reflectors
 - Supply unit included
 - Version with DALI on request
- Colours: white, anthracite, silver on request



- 100% recyclable
- Designed in accordance with the Ecodesign Directive (2019/2020/EU)
- Long LED life due to efficient thermal management




Photometric data

CRI Colour quality	Power level			
	26 W		34 W	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	3842	146	4781	140
840	4045	154	5034	147
927	3130	119	3896	114
930	3306	126	4115	120


Maximum possible, optionally available connected load: 34 W.
According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The photometric values are

standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains two light sources of energy efficiency class D (830/840) or E(927/930).

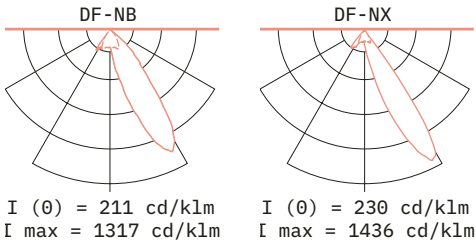


Planing information

DF-NB
Recommended mounting height



DF-NX
Recommended mounting height



Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 1.6 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 \geq 50,000h, Ta 25 °C
	L90/B50 \geq 50,000h, Ta 25 °C
Failure rate	C0/B10 \geq 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	25
Protection class	1
Type of protection	IP20
Certification mark	ENEC / CB

Optional accessories

Product
Set of interchangeable reflector (1x reflector/1x lamellae)/DF-NB, DF-NX
Set of end lamellae reflectors for lateral glare suppression (1 pair left/right)/DF-NB, DF-NX
Safety glas