



Navo NSW



- Lighting technology LED
 - Wallasher
 - Tool-less mounting with track adapter for three-circuit track
 - Floor and wall mounting not permitted
 - Adapter turnable (180°)
 - With integral reflector WW
 - Supply unit included
 - Version with DALI on request
- Colours: white, anthracite, silver on request

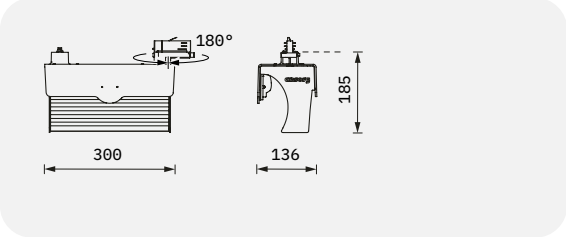


- 100% recyclable
 - Designed in accordance with the Ecodesign Directive (2019/2020/EU)
 - Long LED life due to efficient thermal management
- 

Photometric data


CRI Colour quality	Power level			
	26 W		34 W	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	3967	151	4937	144
840	4177	159	5198	152
927	3232	123	4022	118
930	3415	130	4249	124
940	3579	137	4454	130
Brilliant (⁹³⁰ = Best color/ Best White)	3243	124	4008	117
Meat	-	-	2365	69
NMeat	-	-	1884	55

Maximum possible, optionally available connected load: 34 W
According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The photometric values are

standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains two light sources of energy efficiency class D (830/840), E (927/930/940) or G (Meat/NMeat).



Planing information



Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 2.1 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 \geq 50,000h, Ta 25 °C L90/B50 \geq 50,000h, Ta 25 °C
Failure rate	C0/B10 \geq 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	25
Protection class	1
Type of protection	IP20
Certification mark	ENEC / CB