



# Punta PLR



- Lighting technology LED
  - Tool-less ceiling mounting
  - Ceiling cut-out Ø185 mm
  - Floor and wall mounting not permitted
  - Turning and tilting (360°/65°)
  - With integral reflector SSP, SP, MFL, FL or WFL
  - Supply unit included
  - Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
  - Version with DALI or Casambi on request (Casambi not compatible with metal ceilings)
- Colours: white, anthracite

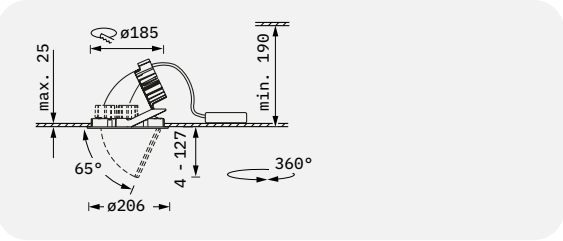






- 100% recyclable
  - Designed in accordance with the Ecodesign Directive (2019/2020/EU)
  - Manufactured with 100% recycled aluminium
  - Long LED life due to efficient thermal management
- 

## Photometric data

CRI Colour quality	Power level					
	34 W		40 W		46 W	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	4469	131	5088	127	5672	123
840	4706	138	5357	134	5972	129
927	3641	106	4145	103	4621	100
930	3847	112	4379	109	4881	105
940	4032	118	4590	114	5116	110
Brilliant ( <sup>930</sup> = Best color/ Best White)	3628	106	4100	102	4530	97
N27	-	-	-	-	3446	75
Meat	2141	63	2402	60	2642	57
NMeat	1706	50	1926	48	2127	45

Maximum possible, optionally available connected load: 50 W.  
According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The values apply to the luminaire with MFL reflector, in the case of the SSP/SP/FL/WFL reflectors the

values can deviate +/- 5%. The photometric values are standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains two light sources of energy efficiency class D (830/840), E (927/930/940), F (N27) or G (Meat/NMeat).

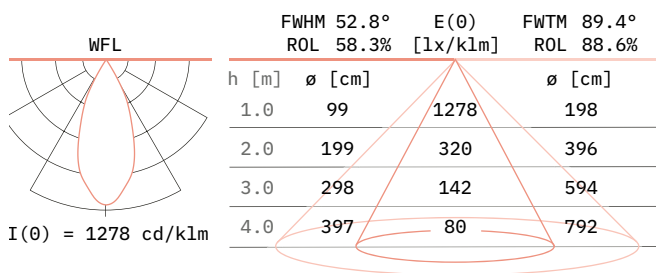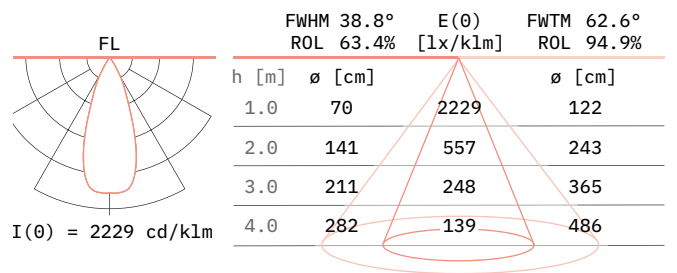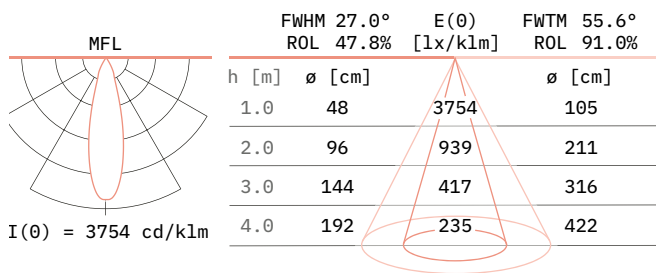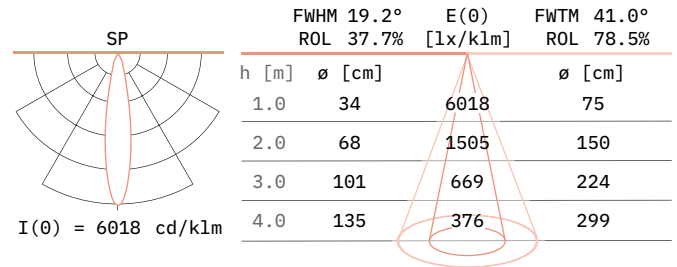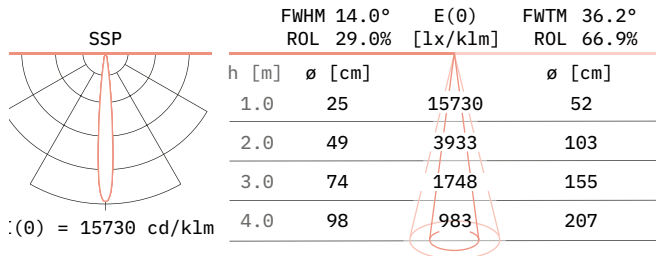

## Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 1.3 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 ≥ 50,000h, Ta 25 °C L90/B50 ≥ 50,000h, Ta 25 °C
Failure rate	C0/B10 ≥ 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	25
Protection class	1
Type of protection	IP20
Certification mark	ENEC / CB