



# Punta PMR



- Lighting technology LED
  - Tool-less ceiling mounting
  - Ceiling cut-out Ø155 mm
  - Floor and wall mounting not permitted
  - Turning and tilting (360°/65°)
  - With integral reflector SSP, SP, MFL, FL or WFL
  - Supply unit included
  - Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
  - Version with DALI or Casambi on request (Casambi not compatible with metal ceilings)
- Colours: white, anthracite

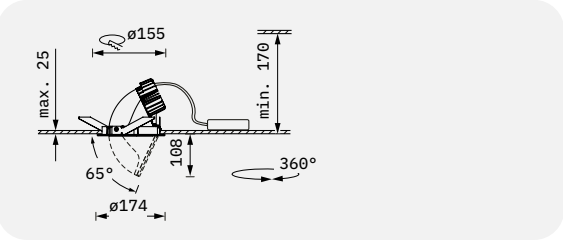






- 100% recyclable
  - Designed in accordance with the Ecodesign Directive (2019/2020/EU)
  - Long LED life due to efficient thermal management
- 

## Photometric data

CRI Colour quality	Power level							
	26 W		30 W		34 W		40 W	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	3550	135	3989	133	4417	129	4969	124
840	3737	143	4200	140	4651	136	5233	130
927	2892	110	3250	108	3599	105	4049	101
930	3055	117	3433	114	3802	111	4277	107
940	3202	122	3599	120	3985	117	4483	112
Brilliant ( <sup>930</sup> = Best color/ Best White)	2902	111	3251	108	3586	105	4004	100
N27	-	-	-	-	-	-	3118	78
Meat	-	-	-	-	-	-	2346	58
NMeat	-	-	-	-	-	-	1882	47

Maximum possible, optionally available connected load: 40 W.  
According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The values apply to the luminaire with MFL reflector, in the case of the SSP/SP/FL/WFL/VWFL reflectors

the values can deviate +/- 5%. The photometric values are standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains two light sources of energy efficiency class D (830/840), E (927/930/940), F (N27) or G (Meat/NMeat).

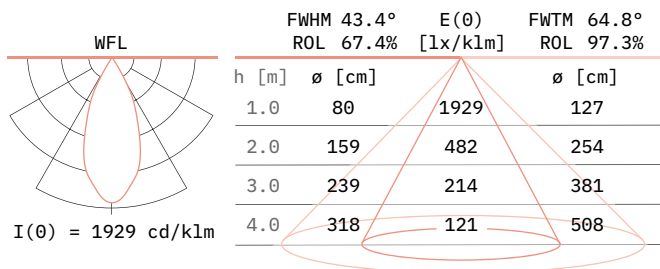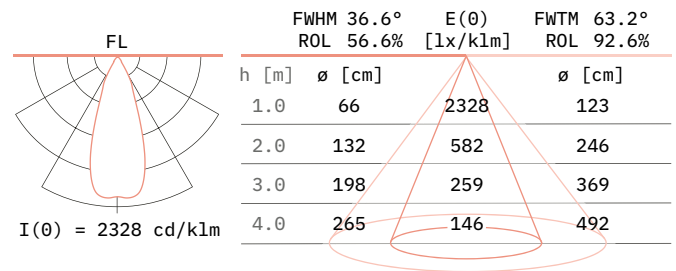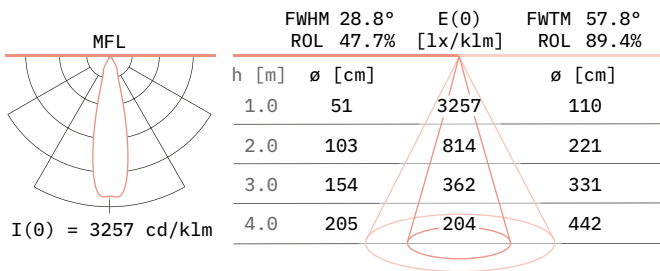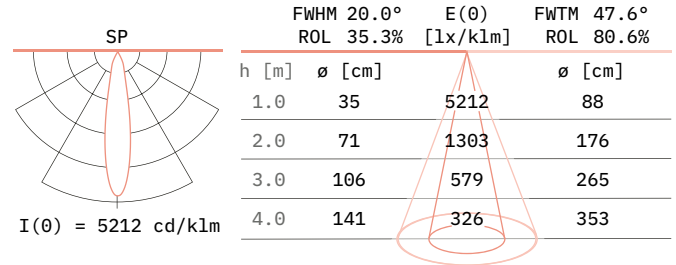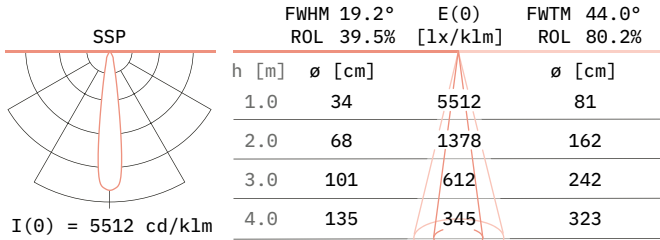

## Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 1.0 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 ≥ 50,000h, Ta 25 °C L90/B50 ≥ 50,000h, Ta 25 °C
Failure rate	C0/B10 ≥ 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	25
Protection class	1
Type of protection	IP20
Certification mark	ENEC / CB