



# Lightstripe LPR



- Lighting technology LED
  - Function panel (single module) with spotlight, tilting and turning (360°/70°)
  - Fitting of the function panel in the frame without the use of tools
  - With integral reflector SP, MFL, FL or WFL
  - Supply unit included
  - Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
  - Version with DALI or Casambi on request (Casambi not compatible with metal ceilings)
- Colours : white, anthracite

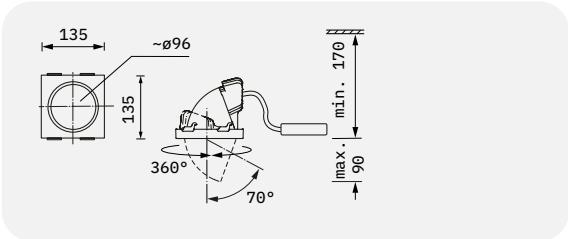





- 100% recyclable
  - Designed in accordance with the Ecodesign Directive (2019/2020/EU)
  - Manufactured with 60% recycled aluminium
  - Long LED life due to efficient thermal management
- 

## Photometric data

Light quality	Power level							
	15 W		19 W		23 W		29 W	
	Luminous flux [lm]	System efficiency [lm/W]	Luminous flux [lm]	System efficiency [lm/W]	Luminous flux [lm]	System efficiency [lm/W]	Luminous flux [lm]	System efficiency [lm/W]
830	1949	131	2380	126	2788	122	3363	116
840	2047	137	2498	132	2927	128	3531	122
927	1588	107	1938	103	2270	100	2739	94
930	1670	112	2038	108	2388	105	2881	99
940	1755	118	2142	113	2510	110	3028	104
Brilliant (930 = Best color/ Best White)	1600	107	1951	104	2278	100	2727	94

According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The values apply to the luminaire with MFL reflector, in the case of the SP/FL/WFL reflectors the values

can deviate +/- 5%. The photometric values are standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains light sources of energy efficiency class D or E.

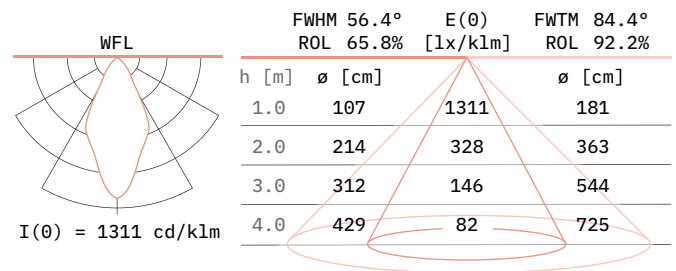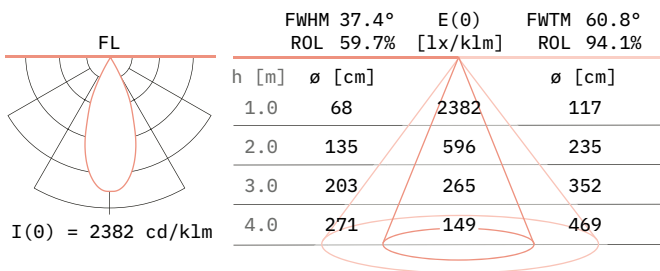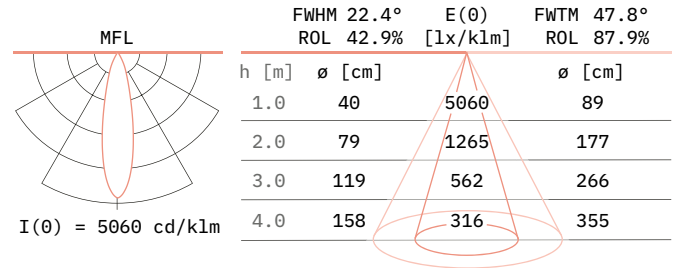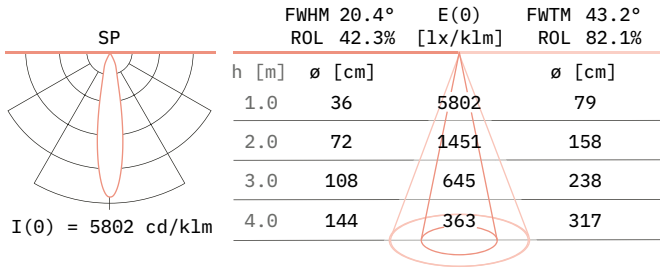

## Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 0.9 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 ≥ 50,000h, Ta 25 °C L90/B50 ≥ 50,000h, Ta 25 °C
Failure rate	C0/B10 ≥ 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker	B16A = 25
Protection class	1
Type of protection	IP20
Certification mark	ENEC / CB

## Accessories

Product	Option
Fitting frame	Lightstripe LLS 1-3 modules

## Optional accessories

Product	Option
Blank panel	Lightstripe LLS 1-2 modules