



Lintra LMT



- Lighting technology LED
 - Linear module for three-circuit track
 - Tool-less mounting with track adapter for three-circuit track (Global or Stucchi)
 - Tilting (90°)
 - Floor and wall mounting not permitted
 - Linear optics with beam characteristic DNB, DMB or DWB
 - Supply unit included
 - Version with DALI on request
- Colours : white, anthracite

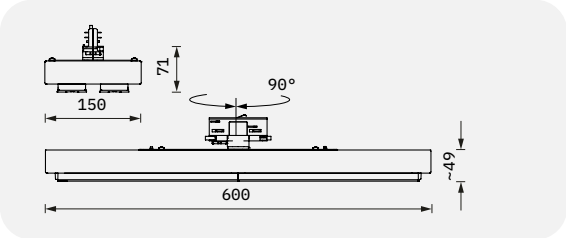


- 100% recyclable
 - Designed in accordance with the Ecodesign Directive (2019/2020/EU)
 - Long LED life due to efficient thermal management
- 

Photometric data

CRI Colour quality	Power level 57,5 W	
	Luminous flux [lm]	System efficiency [lm/W]
830	9758	170
835	10022	174
840	10286	179


According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The photometric values are standard values and refer to the entire luminaire. Other light qualities on request to

info@ansorg.com. This product contains light sources of energy efficiency class D (830/835/840).

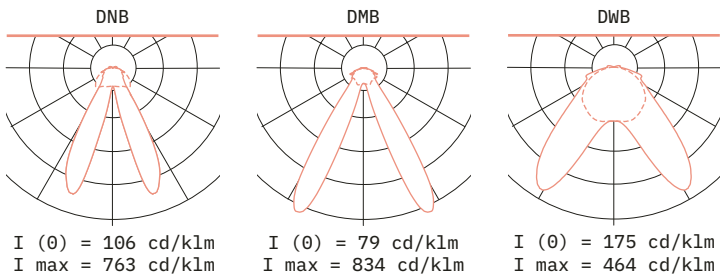


Planning information

Recommended mounting height



Distance of luminaires



Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 2.1 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 $\geq 50,000\text{h}$, Ta 25 °C L90/B50 $\geq 50,000\text{h}$, Ta 25 °C
Failure rate	C0/B10 $\geq 50,000\text{h}$, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	30
Protection class	1
Type of protection	IP20
Certification mark	ENEC / CB in preparation